

CURRENT TRANSFORMERS

IBG



IBG



IBG/1

WINDOW TYPE CURRENT TRANSFORMER

For round conductor \varnothing 40 mm the type IBG/1 is available.

Round conductor	IBG: \varnothing 30 mm
	IBG/1: \varnothing 40 mm


Primary bar	40 x 10 mm
-------------	------------

IBG Technical Features, Executions

Primary rated current A	sec. 5 A / Rated burdens VA		sec. 1 A / Rated burdens VA	
	Class 0,5	Class 1	Class 0,5	Class 1
150	-	2,5	-	2,5
200	-	5	-	5
250	2,5	5	2,5	5
300	3,75	5	3,75	5
400	3,75	5	3,75	5
500	5	7,5	5	7,5
600	5	7,5	5	7,5
750	5	7,5	5	7,5
800	7,5	7,5	7,5	7,5
1000	10	10	10	10

Included in delivery: Primary fixing device (except IBG/1)

Accessories: Mounting feet / snap on mounting bracket EN 50022-35

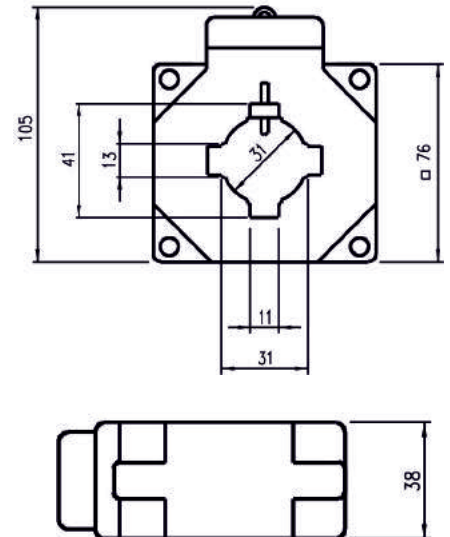

IBG-50



WINDOW TYPE CURRENT TRANSFORMER

The rated burden of this current transformer is higher than the type IBG.

Round conductor: \varnothing 30 mm

Primary bar: 40 x 10 mm

IBG-50 Technical Features, Executions

Primary rated current A	sec. 5 A / Rated burdens VA		sec. 1 A / Rated burdens VA	
	Class 0,5	Class 1	Class 0,5	Class 1
150	2,5	5	2,5	5
200	3,75	7,5	3,75	7,5
250	3,75	7,5	3,75	7,5
300	5	7,5	5	7,5
400	10	10	10	10
500	10	15	10	15
600	10	15	10	15
750	10	15	10	15
800	10	15	10	15
1000	15	20	15	20

Included in delivery: Primary fixing device

Accessories: Mounting feet / snap on mounting bracket EN 50022-35

